


ER - FLYBACK CONVERTER

FEATURES


Low loss material
 Dielectric strength: 2.5k Vrms
 RoHS Compliant



OUTLINE DIMENSIONS

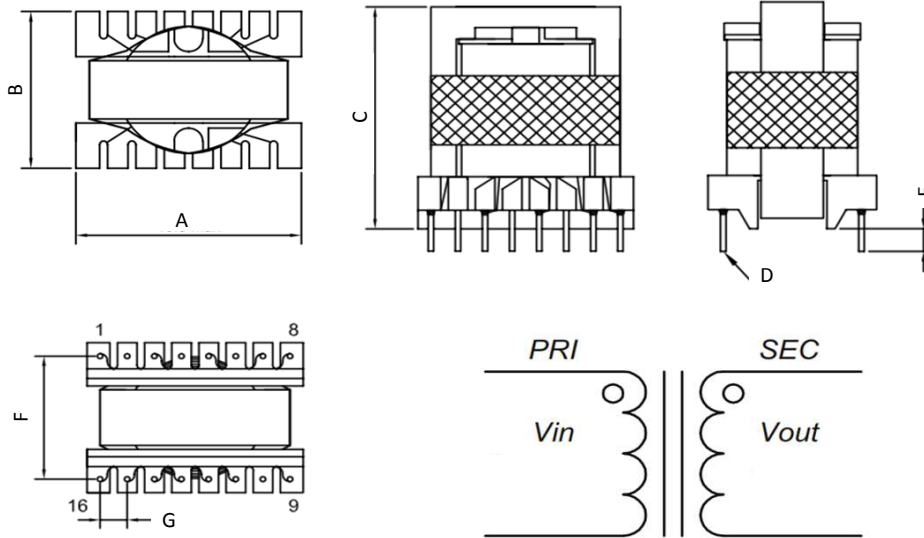

Note:
 Multi Input & Output based on customer request.

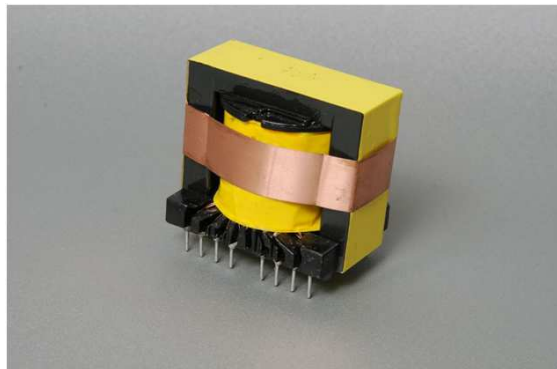

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Row to Row F (mm)	Pin to Pin G (mm)
ER 25	26.8 Max	18.8 Max	11.5 ± 0.2	0.6 ± 0.1	4.5 ± 0.2	14.0 ± 0.2	3.5 ± 0.2
ER 35	40.8 Max	31.5 Max	45.5 ± 0.2	1.0 ± 0.1	4.5 ± 0.2	25.0 ± 0.2	5.0 ± 0.2
ER 42	44.5 Max	32.5 Max	46.5 ± 0.2	0.9 ± 0.1	4.5 ± 0.2	25.0 ± 0.2	5.0 ± 0.2
ER 49	51.5 Max	34.8 Max	53.0 ± 0.2	1.0 ± 0.1	4.5 ± 0.2	17.5 ± 0.2	5.0 ± 0.2
ER 53	54.5 Max	40.5 Max	50.0 ± 0.2	1.0 ± 0.1	4.8 ± 0.2	32.0 ± 0.2	5.0 ± 0.2

Specified parameters are subject to change, without any notice.

Various Type available upon request.

UTSAVGIRI COMPUTERS & ELECTRONIC INDUSTRIES PVT. LTD.,
 Type II/18, Dr.V.S.I Estate, Thiruvanniyur, Chennai – 600 041, INDIA
 Phone : +91-44-22541078,+91-44-22541265.
 Email : utsavgiri@gmail.com