

EI30 - Encapsulated PCB Mount Transformer


FEATURES

- Input Voltage: 115V & 230V Range
- Output Voltage: 6V to 2 x 24V
- Output Power: 0.6VA to 2.8VA
- Split Bobbin Design
- Dielectric Strength: 4500Vrms
- Operation Frequency: 50/60Hz
- RoHS Compliant




OUTLINE DIMENSIONS

1 Secondary

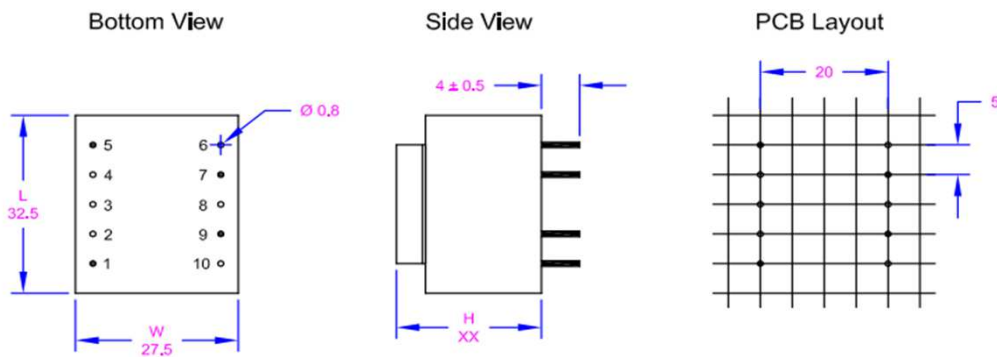

2 Secondary

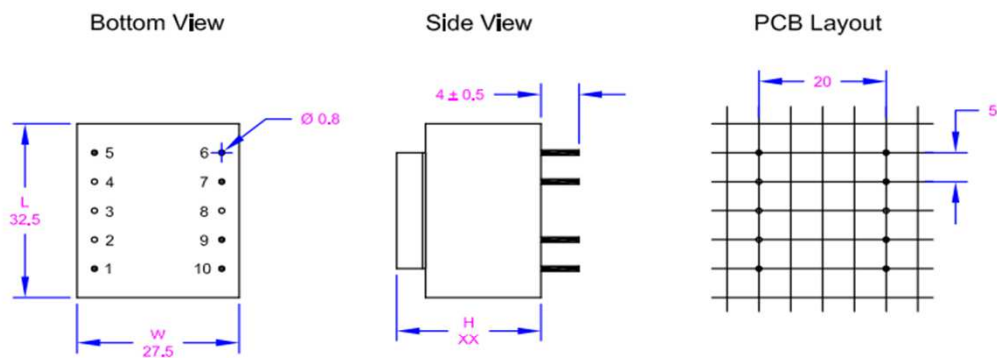

Note:
All Dimension are in mm.



12.5 Series Model

Part No. For 115V	Part No. For 230V	Power (VA)	Secondary Voltage (V)	Secondary Current (A)	Height (mm)	~ Weight (Kg)
UE30 115-1.5-6 S	UE30 230-1.5-6 S	1.5	6	0.250	24.5	0.085
UE30 115-1.5-9 S	UE30 230-1.5-9 S		9	0.167	24.5	0.085
UE30 115-1.5-12 S	UE30 230-1.5-12 S		12	0.125	24.5	0.085
UE30 115-1.5-15 S	UE30 230-1.5-15 S		15	0.100	24.5	0.085
UE30 115-1.5-18 S	UE30 230-1.5-18 S		18	0.083	24.5	0.085
UE30 115-1.5-24 S	UE30 230-1.5-24 S		24	0.063	24.5	0.085
UE30 115-1.5-6 D	UE30 230-1.5-6 D		2 x 6	0.125	24.5	0.085
UE30 115-1.5-9 D	UE30 230-1.5-9 D		2 x 9	0.083	24.5	0.085
UE30 115-1.5-12 D	UE30 230-1.5-12 D		2 x 12	0.063	24.5	0.085
UE30 115-1.5-15 D	UE30 230-1.5-15 D		2 x 15	0.050	24.5	0.085
UE30 115-1.5-18 D	UE30 230-1.5-18 D		2 x 18	0.042	24.5	0.085
UE30 115-1.5-24 D	UE30 230-1.5-24 D		2 x 24	0.031	24.5	0.085
UE30 115-1.8-6 S	UE30 230-1.8-6 S	1.8	6	0.300	24.5	0.085
UE30 115-1.8-9 S	UE30 230-1.8-9 S		9	0.200	24.5	0.085
UE30 115-1.8-12 S	UE30 230-1.8-12 S		12	0.150	24.5	0.085
UE30 115-1.8-15 S	UE30 230-1.8-15 S		15	0.120	24.5	0.085
UE30 115-1.8-18 S	UE30 230-1.8-18 S		18	0.100	24.5	0.085
UE30 115-1.8-24 S	UE30 230-1.8-24 S		24	0.075	24.5	0.085
UE30 115-1.8-6 D	UE30 230-1.8-6 D		2 x 6	0.150	24.5	0.085
UE30 115-1.8-9 D	UE30 230-1.8-9 D		2 x 9	0.100	24.5	0.085
UE30 115-1.8-12 D	UE30 230-1.8-12 D		2 x 12	0.075	24.5	0.085
UE30 115-1.8-15 D	UE30 230-1.8-15 D		2 x 15	0.060	24.5	0.085
UE30 115-1.8-18 D	UE30 230-1.8-18 D		2 x 18	0.050	24.5	0.085
UE30 115-1.8-24 D	UE30 230-1.8-24 D		2 x 24	0.038	24.5	0.085

15.5 Series Model

Part No. For 115V	Part No. For 230V	Power (VA)	Secondary Voltage (V)	Secondary Current (A)	Height (mm)	~ Weight (Kg)
UE30 115-2-6 S	UE30 230-2-6 S	2.0	6	0.333	27.5	0.105
UE30 115-2-9 S	UE30 230-2-9 S		9	0.222	27.5	0.105
UE30 115-2-12 S	UE30 230-2-12 S		12	0.167	27.5	0.105
UE30 115-2-15 S	UE30 230-2-15 S		15	0.133	27.5	0.105
UE30 115-2-18 S	UE30 230-2-18 S		18	0.111	27.5	0.105
UE30 115-2-24 S	UE30 230-2-24 S		24	0.083	27.5	0.105
UE30 115-2-6 D	UE30 230-2-6 D		2 x 6	0.167	27.5	0.105
UE30 115-2-9 D	UE30 230-2-9 D		2 x 9	0.111	27.5	0.105
UE30 115-2-12 D	UE30 230-2-12 D		2 x 12	0.083	27.5	0.105
UE30 115-2-15 D	UE30 230-2-15 D		2 x 15	0.067	27.5	0.105
UE30 115-2-18 D	UE30 230-2-18 D		2 x 18	0.056	27.5	0.105
UE30 115-2-24 D	UE30 230-2-24 D		2 x 24	0.042	27.5	0.105
UE30 115-2.4-6 S	UE30 230-2.4-6 S	2.4	6	0.400	27.5	0.105
UE30 115-2.4-9 S	UE30 230-2.4-9 S		9	0.267	27.5	0.105
UE30 115-2.4-12 S	UE30 230-2.4-12 S		12	0.200	27.5	0.105
UE30 115-2.4-15 S	UE30 230-2.4-15 S		15	0.160	27.5	0.105
UE30 115-2.4-18 S	UE30 230-2.4-18 S		18	0.133	27.5	0.105
UE30 115-2.4-24 S	UE30 230-2.4-24 S		24	0.100	27.5	0.105
UE30 115-2.4-6 D	UE30 230-2.4-6 D		2 x 6	0.200	27.5	0.105
UE30 115-2.4-9 D	UE30 230-2.4-9 D		2 x 9	0.133	27.5	0.105
UE30 115-2.4-12 D	UE30 230-2.4-12 D		2 x 12	0.100	27.5	0.105
UE30 115-2.4-15 D	UE30 230-2.4-15 D		2 x 15	0.080	27.5	0.105
UE30 115-2.4-18 D	UE30 230-2.4-18 D		2 x 18	0.067	27.5	0.105
UE30 115-2.4-24 D	UE30 230-2.4-24 D		2 x 24	0.050	27.5	0.105

18 Series Model

Part No. For 115V	Part No. For 230V	Power (VA)	Secondary Voltage (V)	Secondary Current (A)	Height (mm)	~ Weight (Kg)
UE30 115-2.3-6 S	UE30 230-2.3-6 S	2.3	6	0.383	30	0.115
UE30 115-2.3-9 S	UE30 230-2.3-9 S		9	0.256	30	0.115
UE30 115-2.3-12 S	UE30 230-2.3-12 S		12	0.192	30	0.115
UE30 115-2.3-15 S	UE30 230-2.3-15 S		15	0.153	30	0.115
UE30 115-2.3-18 S	UE30 230-2.3-18 S		18	0.128	30	0.115
UE30 115-2.3-24 S	UE30 230-2.3-24 S		24	0.096	30	0.115
UE30 115-2.3-6 D	UE30 230-2.3-6 D		2 x 6	0.192	30	0.115
UE30 115-2.3-9 D	UE30 230-2.3-9 D		2 x 9	0.128	30	0.115
UE30 115-2.3-12 D	UE30 230-2.3-12 D		2 x 12	0.096	30	0.115
UE30 115-2.3-15 D	UE30 230-2.3-15 D		2 x 15	0.077	30	0.115
UE30 115-2.3-18 D	UE30 230-2.3-18 D		2 x 18	0.064	30	0.115
UE30 115-2.3-24 D	UE30 230-2.3-24 D		2 x 24	0.048	30	0.115
UE30 115-2.8-6 S	UE30 230-2.8-6 S	2.8	6	0.467	30	0.115
UE30 115-2.8-9 S	UE30 230-2.8-9 S		9	0.311	30	0.115
UE30 115-2.8-12 S	UE30 230-2.8-12 S		12	0.233	30	0.115
UE30 115-2.8-15 S	UE30 230-2.8-15 S		15	0.187	30	0.115
UE30 115-2.8-18 S	UE30 230-2.8-18 S		18	0.156	30	0.115
UE30 115-2.8-24 S	UE30 230-2.8-24 S		24	0.117	30	0.115
UE30 115-2.8-6 D	UE30 230-2.8-6 D		2 x 6	0.233	30	0.115
UE30 115-2.8-9 D	UE30 230-2.8-9 D		2 x 9	0.156	30	0.115
UE30 115-2.8-12 D	UE30 230-2.8-12 D		2 x 12	0.117	30	0.115
UE30 115-2.8-15 D	UE30 230-2.8-15 D		2 x 15	0.093	30	0.115
UE30 115-2.8-18 D	UE30 230-2.8-18 D		2 x 18	0.078	30	0.115
UE30 115-2.8-24 D	UE30 230-2.8-24 D		2 x 24	0.058	30	0.115

5 Series Model

Part No. For 115V	Part No. For 230V	Power (VA)	Secondary Voltage (V)	Secondary Current (A)	Height (mm)	~ Weight (Kg)
UE30 115-0.6-6 S	UE30 230-0.6-6 S	0.6	6	0.100	16	0.045
UE30 115-0.6-9 S	UE30 230-0.6-9 S		9	0.067	16	0.045
UE30 115-0.6-12 S	UE30 230-0.6-12 S		12	0.050	16	0.045
UE30 115-0.6-15 S	UE30 230-0.6-15 S		15	0.040	16	0.045
UE30 115-0.6-18 S	UE30 230-0.6-18 S		18	0.033	16	0.045
UE30 115-0.6-24 S	UE30 230-0.6-24 S		24	0.025	16	0.045
UE30 115-0.6-6 D	UE30 230-0.6-6 D		2 x 6	0.100	16	0.045
UE30 115-0.6-9 D	UE30 230-0.6-9 D		2 x 9	0.067	16	0.045
UE30 115-0.6-12 D	UE30 230-0.6-12 D		2 x 12	0.050	16	0.045
UE30 115-0.6-15 D	UE30 230-0.6-15 D		2 x 15	0.040	16	0.045
UE30 115-0.6-18 D	UE30 230-0.6-18 D		2 x 18	0.033	16	0.045
UE30 115-0.6-24 D	UE30 230-0.6-24 D		2 x 24	0.025	16	0.045

10.5 Series Model

Part No. For 115V	Part No. For 230V	Power (VA)	Secondary Voltage (V)	Secondary Current (A)	Height (mm)	~ Weight (Kg)
UE30 115-1-6 S	UE30 230-1-6 S	1.0	6	0.167	22.5	0.075
UE30 115-1-9 S	UE30 230-1-9 S		9	0.111	22.5	0.075
UE30 115-1-12 S	UE30 230-1-12 S		12	0.083	22.5	0.075
UE30 115-1-15 S	UE30 230-1-15 S		15	0.067	22.5	0.075
UE30 115-1-18 S	UE30 230-1-18 S		18	0.056	22.5	0.075
UE30 115-1-24 S	UE30 230-1-24 S		24	0.042	22.5	0.075
UE30 115-1-6 D	UE30 230-1-6 D		2 x 6	0.083	22.5	0.075
UE30 115-1-9 D	UE30 230-1-9 D		2 x 9	0.056	22.5	0.075
UE30 115-1-12 D	UE30 230-1-12 D		2 x 12	0.042	22.5	0.075
UE30 115-1-15 D	UE30 230-1-15 D		2 x 15	0.033	22.5	0.075
UE30 115-1-18 D	UE30 230-1-18 D		2 x 18	0.028	22.5	0.075
UE30 115-1-24 D	UE30 230-1-24 D		2 x 24	0.021	22.5	0.075

Various model available upon request.

UTSAVGIRI COMPUTERS & ELECTRONIC INDUSTRIES PVT. LTD.,

Type II/18, Dr.V.S.I. Estate, Thiruvanmiyur, Chennai – 600 041, INDIA

Phone : +91-44-22541078,+91-44-22541265.

Email : utsavgiri@gmail.com